


# Dome

## VARI-FOCAL EYEBALL IR DOME CAMERA

### DTV-IRDOMEVF

#### DIMENSIONS

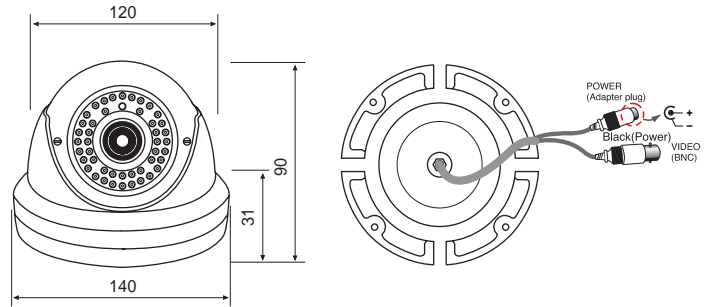

#### SPECIFICATIONS

TV system	NTSC	PAL
Image Sensor	1/3" Sony Super HAD Color CCD	
Effexive Pixels	(H)768 x (V) 494	(H)752 x (V)582
Shutter Speed	1/60 - 1/100,000	1/50 - 1/100,000
Scanning System	525Lines, 60Field/Sec	625Lines, 50Field/Sec
Sync. System	Internal Synchronization	
Resolution	540 TV Lines	
Video Output	1Vp-p 75ohm, Negative	
S/N Ratio	More Than 48dB(AGC Off)	
Min. Illumination	0.0 Lux	
Gamma	r=0.45	
White Balance	ATW	
White Balance Range	AWB, ATW(3,200~10,00K)	
Gain Control	AGC	
LED	45 IR LEDs (850mm x 30degree)	
Lens	4 - 9mm Vari focal	
Power Consumption	DC 12V 600mA(IR LED ON)	
Operating Temp.	-10℃ ~ 50℃	
Operational Humidity	Within 90% RH	
Housing	Aluminum Die Casting	

#### FEATURES

- ▶ 1/3" Sony Super HAD CCD
- ▶ 540 TV Lines
- ▶ 15m IR Range
- ▶ 0.1 Lux at F2.0 (CDS Sensor on 0.00 Lux)
- ▶ High Quality Image
- ▶ 4~9mm Varifocal Lens
- ▶ Built in 45 IR LEDs
- ▶ Weatherproof armoured dome
- ▶ 3 axis gimbal

